

Linksys^{PLUS}



LINKSYS VELOP AC6600 SETUP GUIDE


Manual



Scan the QR code
to visit our website


Linksys Velop AC6600 Setup Guide

- Connect the main Linksys Velop node with the cable modem via Ethernet cable.
- Pick the one with the WAN port (the one that looks different).
- Plug it into your modem with the included Ethernet cable. Power it on.
- Wait for the light to start pulsing purple. If it's orange, something's off with the internet. Don't move on until it's purple.

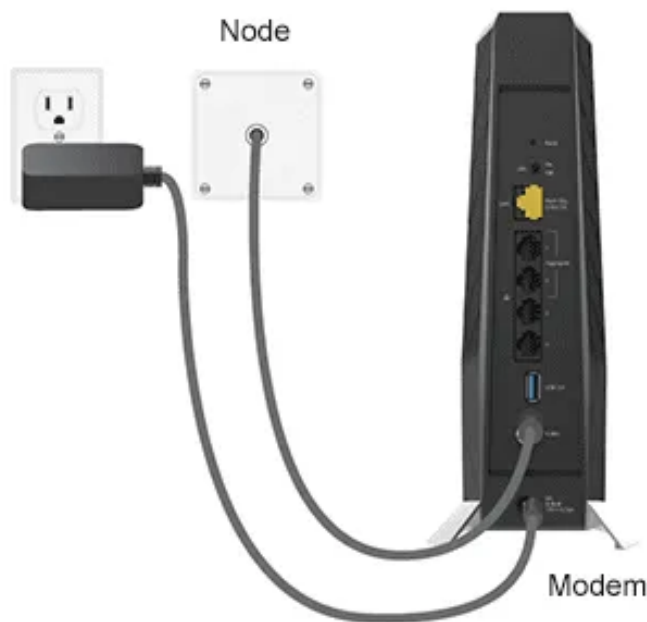


Linksys Velop Login with Linksys App

- Download the Linksys App. Grab it from the App Store or Google Play.
- Disable Your Old Network. Unplug the old router. If it's still live, you'll confuse yourself and the app.
- Take the main Velop node, plug it into your modem using the Ethernet cable. Power it up. Wait for the light to go purple. It takes a minute.

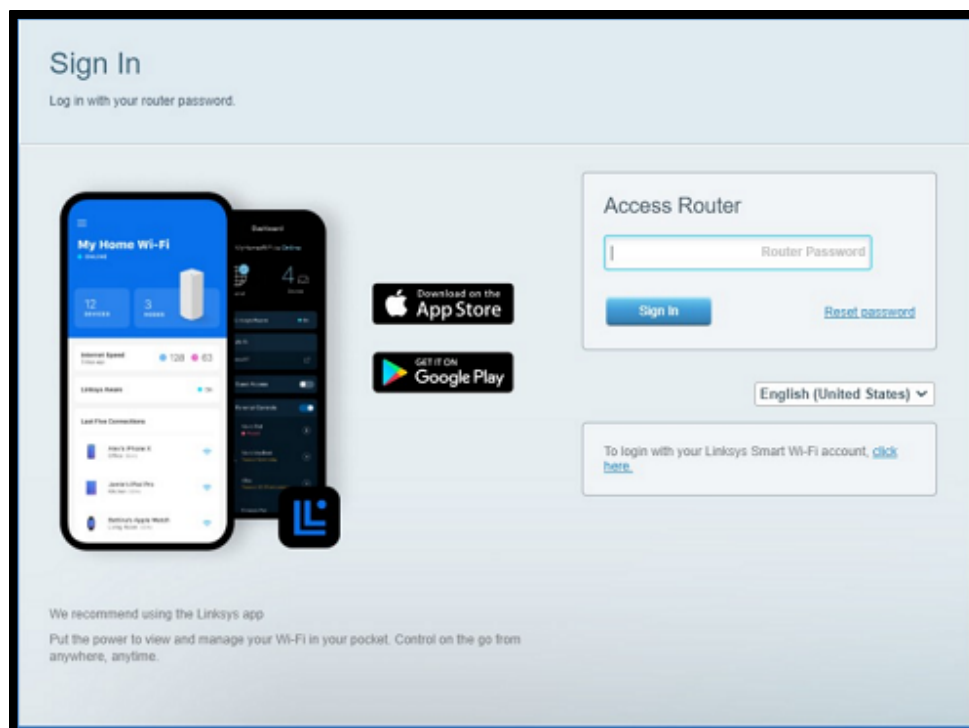

- Open the App and Log In. Open up the Linksys app. You'll need a Linksys account. Just do it. Or log in if you already have one.

- The app will ask to scan for your Velop. Let it. If it doesn't find it? Unplug and re-plug the node. Worked for me.
- Name Your Network. You pick a Wi-Fi name and password. This will replace whatever you had before. Just set it and move on.

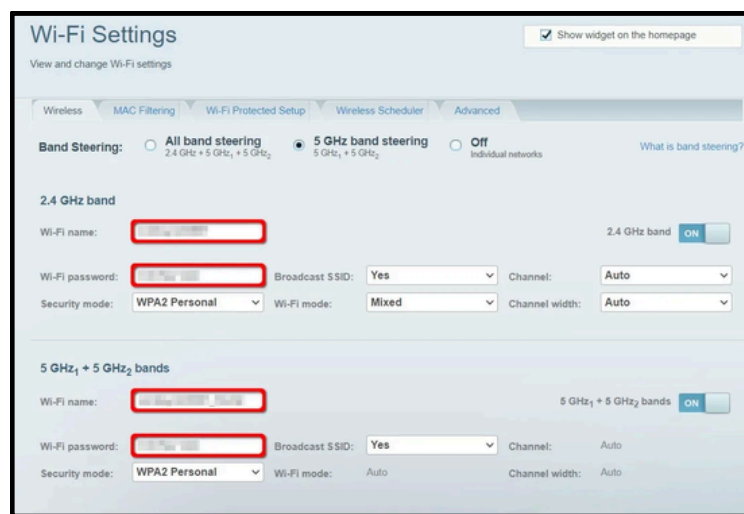

- Name Your Network. You pick a Wi-Fi name and password. This will replace whatever you had before. Just set it and move on.
- Add More Nodes. If you bought the 3-pack, this part is easy. Hit "Add Node" in the app. Plug in the next one halfway across the house from the main node.
- The app will tell you if the spot is not appropriate. Repeat for the third node if you have it.
- It'll probably force an update right away. Let it happen. It can take like 10 minutes.
- Once all nodes show up in the app and the light turns solid blue, you're golden. Test your Wi-Fi. If the speeds are trash, move the nodes.



THANK YOU

✉ support@linksys-wireless.com



Scan the QR code to
visit our website